



Europäisches Patentamt
European Patent Office
Office européen des brevets

Publication number:

0 101 878
A2

EUROPEAN PATENT APPLICATION

Application number: 83107026.3

Int. Cl.³: **C 10 G 11/18**
C 10 G 57/00

Date of filing: 18.07.83

Priority: 29.07.82 US 403241

Date of publication of application:
07.03.84 Bulletin 84/10

Designated Contracting States:
AT BE DE FR GB IT NL SE

Applicant: **ASHLAND OIL, INC.**
R.C. Willson, Jr. P.O. Box 391, BL-5
Ashland Kentucky 41114(US)


Inventor: **Hettinger, William P., Jr.**
203 Meadowlark Road
Russell Kentucky 41169(US)

Representative: **Staub, Gabriella, Dr.-Ing. et al,**
Baaderstrasse 3
D-8000 München 5(DE)

Combination process for upgrading reduced crude.

In a reduced crude conversion the catalyst is regenerated with mixture of oxygen-enriched gas and H₂O either as steam or preferably as water to provide additional expansion and facilitate fluidization, while converting coke on catalyst to CO and H₂ with minimum CO₂ formation. The CO can be

combined with hydrogen to produce methane, methanol or Fischer-Tropsch liquid hydrocarbons or can be passed through the reduced crude conversion operation as lift gas, or as cooling medium or subjected to water-gas shift to produce additional H₂.

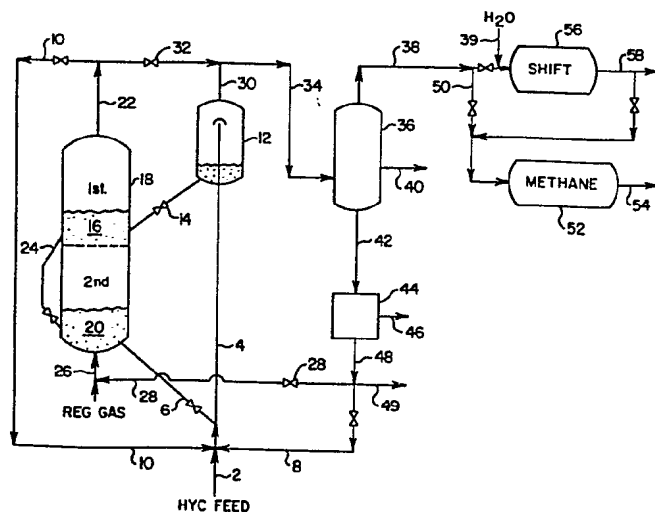

A COMBINATION PROCESS FOR UPGRADING REDUCED CRUDE

Background of the Invention

5 The combination operation of this innovative processing sequence embodies scattered excerpts of the prior art in a synergistic relationship particularly contributing to efficient reduced crude processing.


10 The reaction of steam with coke on solid substrates was the subject of a paper by T.Y. Yan and M.P. Rosynek given before the American Chemical Society in September 1979, Washington Meeting. In this paper
15 reference is made to the catalytic processing of heavy oil and residua over cracking catalysts and various schemes for removing deposited coke using steam and oxygen by referring to U.S. Patents 3691063, 3726791 and 3983030.

20 U.S. Patent 3433732 discloses steam reforming a heated hydrocracking catalyst to produce hydrogen and regenerate the catalyst at the same time.

25 U.S. Patent 2888395 discloses a catalytic coking process whereby coked catalyst is steam reformed to produce hydrogen.

30 U.S. Patent 2702267 discloses the mixing of spent and regenerated catalyst particles in a soaking zone and using hot regeneration product gases as the fluidizing and stripping gas in the soaking zone. The catalyst is regenerated at a temperature above 760°C (1400°F) with a mixture of steam and high purity oxygen comprising no more than 10 vol. % of nitrogen to produce
35 a flue gas product comprising hydrogen, carbon oxides and

excess steam. When the mixture of steam and high purity oxygen is used as the regenerating medium, the principal reactions are:

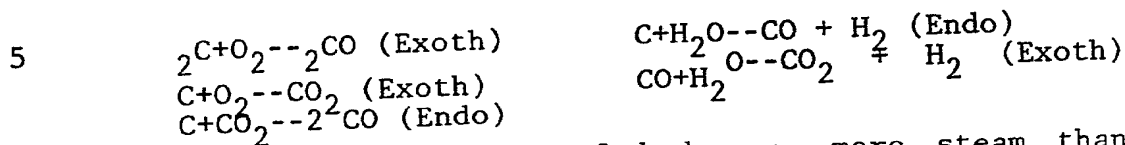

To insure a high yield of hydrogen, more steam than oxygen is used.

10

British Patent 2001545 describes a two stage regeneration operation controlled so that only partial regeneration of catalyst particles occurs in the first zone and the catalyst particles are not heated

15

excessively and a CO flue gas is produced.

The use of CO_2 or steam with an oxygen containing steam is disclosed whereby a flue gas of high CO or CO-hydrogen concentration is obtained. Such a

20

steam is valuable for use in water-gas shift to produce hydrogen. The regeneration zones are positioned one above the other so that partially regenerated catalyst may flow from the upper zone to the lower zone by gravity. Regeneration gas used in upper zone may be

25

either (H_2 +steam, O_2 + CO_2 , O_2 +steam+ CO_2 depending on composition of flue gas particularly desired. Preferably the gas charged to the second stage of regeneration if air.

30

U.S. Patent 4244811 discloses the catalytic cracking of a hydrocarbon feed in the presence of water and subjecting deactivated catalyst with coke deposits to gasification conditions consisting of partial oxidative combustion to produce gas rich in CO or with the addition

of steam to produce a gas rich in hydrogen or both CO + H₂.

5 U.S. Patent 3691063 relates to a residual fuel
oil hydrocracking process wherein a residuum feed is
subjected to metals removal in a guard case containing an
acid catalyst along with asphaltenes. The guard catalyst
is regenerated with steam and oxygen to maximize hydrogen
10 production by partial oxidation of asphaltenes. The
hydrogen produced is used in the hydrocracking step.
Hydrogen plus carbon monoxide from the guard chamber
regeneration is fed to a two stage water gas shift
operation where steam is reacted with the carbon monoxide
to form additional hydrogen and carbon dioxide.

15 U.S. Patent 3726791 related to a process where
high Conradson carbon feeds are coked to lay down carbon
deposits on a gasification catalyst and the coked
catalyst is steam gasified to produce hydrogen.

20 U.S. Patent 3983030 relates to a process for
demetalation and desulfurization of residua and deposited
coke gasification with steam and free oxygen to produce
producer gas and regenerate a porous refractory oxide
25 used to demetallize and desulfurize the residual.

Summary of the Invention

30 In processing a reduced crude feed or a
residual oil boiling above about 343°C (650°F) comprising
metal contaminants and Conradson carbon producing
components, there are several significant factors one
must consider and deal with in the operation. These

factors include large deposition of hydrocarbonaceous material, more often referred to as coke or coke make on the catalyst, metals contaminant level, and the presence of sulfur and to a lesser extent nitrogen. The amount of coke made is a function of feed composition and severity of the hydrocarbon conversion operation. The amount of coke made also influences the regeneration operation at least with respect to the temperatures encountered to obtain desired coke removal and optimize regenerated catalyst activity, since maximum catalyst activity and selectivity should result from eliminating coke or carbon residue on the catalyst. In addition to the above it is necessary to control the deactivating effects of metal contaminants so as to minimize undesired hydrogen production at the expense of desired product and production of increased coke deposition particularly promoted by reduced metals on the catalyst. Another important factor requiring consideration is particularly concerned with controlling the emissions of sulfur oxides and nitrogen oxides or their recovery from the processing unit and particularly the regeneration operation of the process.

In the combination process of this invention it is proposed in one aspect that the spent catalyst of hydrocarbon conversion comprising carbonaceous deposits and containing hydrogen by regenerated with a mixture of oxygen rich gas greater than provided by air and water such as steam so as to facilitate the fluid catalyst regeneration while converting deposited carbonaceous material (coke) to particularly CO with the oxygen-steam mixture under conditions to restrict production of CO₂ to a low minimum. Thus it is proposed to realize a flue gas

product of the regeneration operation comprising CO, sulfur oxides, nitrogen oxides, steam and hydrogen and some CO₂ absent combustion supporting amounts of oxygen with considerably enhanced regeneration temperature control. In combination with the above the flue gas thus produced is cooled and condensed to remove water, sulfur oxides and nitrogen oxides leaving a CO rich flue gas comprising some CO₂ and hydrogen. In one particular embodiment it is contemplated combining the CO rich flue gas of regeneration above recovered with a hydrogen rich gas product stream of an adjacent hydrocarbon conversion operation to provide a syngas product convertible to methane and/or methanol for use as herein discussed. In yet another embodiment, the CO rich flue gas above recovered is charged with the high boiling hydrocarbon feed as a fluidizing and atomizing gas to the reaction zone and to help with obtaining intimate contact with particles of catalyst in combination with reducing coke and hydrogen production as herein discussed.

The use of an oxygen enriched regeneration gas or one of high oxygen purity at least twice that of air comprising steam is instrumental in recovering a CO rich flue gas free of nitrogen oxides from the catalyst regeneration and combination operation of the invention. The recovered CO rich regeneration flue gases of lower CO₂ content may also be used for stripping catalyst separated from vaporous hydrocarbon products and before affecting regeneration of the stripped catalyst by the method of the invention. The hydrocarbon conversion-regeneration technique of this invention permits controlling regeneration temperatures within a relatively narrow range during reduction of deposited

coke to a desired low level below 0.25 weight percent and preferably below 0.1 weight percent, reduced metals activity in the conversion zone, improves product selectivity of the hydrocarbon conversion operation, and
5 considerably reduces the use of expensive air compressors for achieving adequate fluidization of catalyst particles during regeneration thereof.

The processing combination of this invention
10 and synergistics relationship of the combination operation to provide a more efficient-economical operation is particularly geared to processing topped
crudes, reduced crudes, vacuum bottoms, heavy asphaltic
crudes, coal crude oils, shale oils and tar sands oil
15 products. The fluid catalytic cracking operation of the combination process of this invention particularly comprises an elongated riser reactor discharging into a
catalyst-hydrocarbon vapor separating vessel and catalyst
collecting vessel. The catalyst is separated from
20 hydrocarbon product vapors upon discharge from the riser as by a ballistic separation technique or other suitable techniques known in the industry. The separated catalyst is collected and passed to a catalyst stripping zone and
thence is passed to catalyst regeneration comprising in
25 particular a two stage catalyst regenerated operation herein discussed. A regeneration vessel or apparatus arrangement such as provided in copending application
6091 filed 4/19/82 or that of 6026 filed
10/21/82 may be employed by the method of this
30 invention. In any one of these apparatus arrangements the spent catalyst comprising hydrocarbonaceous deposits and referred to herein as coke is charged to an upper fluid bed of catalyst particles being regenerated as

herein provided. In this first stage of regeneration the spent catalyst is partially regenerated at temperatures below 760°C (1400°F) by removing from 40 to 80% of the coke deposits on the catalyst in the presence of partially spent oxygen rich regeneration gases comprising CO₂ recovered from a lower regeneration section as herein discussed. The partially regenerated catalyst thus obtained is then passed by gravity from the upper bed of catalyst in the first regeneration zone to a lower bed of catalyst in a second regeneration zone where it contacts fresh high purity oxygen to steam or O₂ plus CO₂ regeneration gases or other high purity oxygen rich gas to produce a regenerated catalyst comprising residual carbon less than about 0.1 weight percent and preferably no more than about 0.05 weight percent residual carbon. Catalyst particles thus regenerated and recovered at a temperature below 760°C (1400°F) are passed to the riser cracking zone wherein the catalyst forms a suspension with a mixture of hydrocarbon feed, water and with or without a CO rich fluidizing gas obtained as herein provided to initiate a new cycle of the combination process.

The fluidizing gas particularly employed in the riser reactor of the combination operation of this invention is a particular regeneration flue gas product produced as herein provided and exiting from the two stage regeneration operation described. The make up of this flue gas product is controlled by this oxygen-steam-CO₂ content of the regeneration gas employed in the combination regeneration operation. That is the make up of the flue gas is determined by the steam-oxygen content or ratio of the regeneration gas initially

charged to the bottom regeneration section and the temperature control exercised upon the dilute and dense catalyst phase thereof. For example, the use of air and a regeneration temperature equal to or less than 732°C (1350°F) will yield a CO-nitrogen containing flue gas of low CO₂ content. As temperatures are raised through the use of excess oxygen or CO burning in the dense or dilute catalyst phases, the flue gas will comprise CO₂ unconsumed oxygen and less nitrogen as regeneration air is enriched with oxygen. Thus the nitrogen content of the flue gas may be considerably reduced by using oxygen enriched air or a high purity oxygen-CO₂ rich stream as the regeneration gas to produce CO and/or CO₂ rich flue gases of low or no nitrogen oxides. Since sulfur oxides are a product of the hydrocarbon feed, little can be done except as provided herein to further reduce sulfur oxides in flue gas.

The use of a CO and/or CO₂ containing flue gas product of the regeneration operation as a fluidizing gas in the hydrocarbon riser reaction zone is of considerable advantage and may be used to control the hydrogen produced by catalytic conversion of the heavy hydrocarbon feed by particularly keeping the metals in the feed and deposited on the catalyst in an oxidized state which also operates to reduce the formation of carbon by reduced metals. This particular fluidizing gas composition comprising CO and CO₂ will also undergo to some extent the well known water gas shift reaction with water introduced with the feed at the hydrocarbon conversion conditions. Hydrogen produced by the water gas shift reaction will operate to suppress hydrogen produced by metals cracking without substantially interfering with

suppression of coke formation. The CO-steam containing flue gas recovered as high regeneration temperatures up to 760°C (1400°F) may also be used as a heat sink source to supplement the endothermic heat of reaction required in the hydrocarbon riser conversion zone. This CO-steam rich flue gas may be introduced to the bottom of the riser or at one or more points along the length of the riser. In addition the CO-steam rich flue gas may be introduced to the bottom of the riser or at one or more points along the length of the riser. In addition the CO-steam containing flue gas of relatively low CO₂ content may be introduced to the collected catalyst following separation of hydrocarbon vapors to effect an initial high temperature stripping of the separated catalyst.

A CO₂ rich flue gas may be employed to strip regenerated catalyst initially contacted with high purity oxygen prior to passage thereof to the hydrocarbon conversion zone to remove oxygen from the catalyst.

In one particular embodiment, it is contemplated mixing a CO rich gas product of catalyst regeneration with or without formed hydrogen therein with a hydrogen rich gaseous product recovered from the vaporous products of hydrocarbon conversion to form a syngas mixture thereof. In this particular embodiment, light gaseous product hydrocarbons recovered from vaporous products of hydrocarbon conversion are treated to removed formed ammonia and acid components such as sulfur oxides, hydrogen sulfide to provide a light hydrocarbon stream comprising hydrogen. The hydrogen rich gases thus recovered are mixed with CO rich gases of

the regeneration operation to form a syngas mixture charged to a methanation reactor zone, or a methanol conversion unit, to form methane and/or methanol. The exothermic reaction heat thus generated is recovered by heat exchange means not shown and/or are used with produced methane to furnish heat to the regeneration operation and/or used as fuel to furnish power to drive a gas turbine to generate compressor power.

10 The combination process of this invention thus contemplates the several variations herein identified and used either alone or in combination with one another to achieve the following particular operating concepts. That is, an oxygen enriched gas in combination with steam
15 is used to regenerate catalyst under conditions to produce a CO rich flue gas containing hydrogen in combination with little CO₂ and very little nitrogen oxide and sulfur oxide containing materials. The flue gas thus produced is used either with or without sulfur
20 oxides removal as fluidizing gas in a reduced crude riser conversion zone or a portion thereof is mixed with hydrogen rich product gases of the hydrocarbon conversion operation with or without gas shift, and manipulated to achieve additional hydrogen production than contributed
25 by the hydrocarbon feed within the riser cracking zone. The syngas mixture thus obtained is subjected to a further water gas shift operation in one embodiment to produce addition syngas before converting the syngas product of the operation to methanation or methanol
30 production. The exothermic temperature of the methanation reaction may be used to preheat gases charged to the regeneration operation and/or provide fuel for a

-11-

fired turbine prime mover arrangement providing compressed regeneration oxygen containing gases.

5 In yet another embodiment, it is particularly contemplated stripping spent catalyst particles comprising carbonaceous deposits before oxygen combustion in admixture with hot regenerated catalyst particles to provide a mix temperature thereof within the range of 566°C (1050°F) to about 649°C (1200°F) and using as a
10 fluidizing and stripping medium, flue gas products of regeneration of selected CO and/or CO₂ content obtained as provided herein. Thus the stripping medium may be selected from a number of gasoue product materials of the process comprising steam, CO, CO₂, and mixtures thereof
15 particularly contributing to controlled temperature reaction of spent hydrocarbon conversion catalyst. In this operating environment the catalyst may be initially subjected to steam stripping at the temperature recovered from the hydrocarbon conversion operation and then
20 further stripped at the higher temperature in admixture with hot regenerated catalyst particles as above discussed. The first stage of stripping may be accomplished in a dense fluid bed of catalyst external to or about the riser reactor and the second stage stripping
25 may be accomplished in an upflowing riser contact zone or a dense fluid bed contact zone under conditions particularly encouraging the removal of insufficiently converted hydrocarbon material from the catalyst with CO, CO₂, steam and combinations thereof suitable for the
30 purpose. Catalyst thus stripped is then passed to the first stage of catalyst regeneration of the two stage regeneration operation herein discussed. In this two stage regeneration, oxygen enriched air or high purity

-12-

oxygen containing gas admixed with considerable steam is charged to the second stage of regeneration in an amount sufficient to achieve substantially total removal of deposited carbonaceous material from the catalyst as
5 charged to the first stage of regeneration and product gases of the second stage regeneration operation are charged to the first regeneration stage to accomplish up to 80% removal of deposited carbonaceous material therein and produce a flue gas stream absent combustion
10 supporting amounts of oxygen particularly comprising a CO rich flue gas stream containing steam.

Discussion of Specific Embodiments

15 The drawing is a diagrammatic sketch in elevation of the combination process of this invention as particularly related to the catalytic conversion of reduced crudes, regeneration of catalyst used therein to produce of CO rich flue gas comprising steam, the
20 recovery of hydrogen rich gases from the products of a selective reduced crude hydrocarbon conversion operation and the generation of methane and/or methanol heat for use in the process from syngas products of catalyst regeneration and reduced crude conversion.

25 Referring now to the drawing by way of example there is shown a diagrammatic arrangement of interconnected vessels or process zones for practicing the concepts of this invention particularly directed to
30 processing reduced crudes. In the arrangement of the drawing, a reduced crude feed or other high boiling material herein identified is charged by conduit 2 to a riser reaction zone 4 wherein it contacts hot regenerated

catalyst charged to riser 4 by standpipe 6. In addition thereto a condensed water product of the process which has been treated to partially remove sulfur and nitrogen compounds therein is charged for admixture with the feed by conduit 8. On the other hand water with some dissolved sulfur compound may be charged with advantage to the riser to suppress undesired deposited metal contaminant activity. To facilitate contact of the heavy oil feed with the catalyst as herein provided and discussed above, a special flue gas product of regeneration obtained as herein provided may also be charged for admixture with the hydrocarbon feed by conduit 10. It is to be understood that the materials charged by conduits 10, 8 and 2 do not necessarily need to meet at a common point but may be charged in a manner most expedient to achieve mixing and atomization of the charged high boiling hydrocarbon feed for dispersed phase contact with hot regenerated catalyst particles. The conversion of the hydrocarbon feed in riser 4 employing an equilibrium conversion catalyst comprising metal contaminant deposits above fresh feed catalyst up to about 30,000 ppm Ni equivalent is monitored and controlled to achieve selective conversion of the hydrocarbon feed in the presence of hydrogen generated in the operation as discussed above in a reaction time frame restricting undesired reactions promoted by reduced metal contaminants. Thus in the particular hydrocarbon conversion operation of this invention the reactants charged to a riser conversion zone to form a suspension thereof and reaction conditions maintained therein are selected to particularly achieve conversion of the feed to higher yields of more desirable lower boiling products in combination with producing a product gas of relatively

-14-

high hydrogen to CO ratio. Following hydrocarbon feed traverse of the riser reaction zone in a time frame within the range of 0.5 to about 4 seconds under primarily endothermic reaction conditions to provide a riser outlet temperature within the range of 950 to 621°C (1150°F), gasiform material comprising hydrocarbon vapors is separated from entrained catalyst particles and separated catalyst particles are collected in the lower portion of a catalyst collecting zone 12 about the upper end of the riser discharge. A fluidizing gas not shown may be charged to the bottom of a bed of collected catalyst in zone 12 to maintain it in a fluid like condition and effect some stripping of any vaporizable and strippable material from the collected catalyst. Stripping with steam, CO₂ or high temperature noncombustion supporting flue gas may be employed in this initial stripping of the catalyst in zone 12. Although not shown, it is contemplated employing a separate stripping zone adjacent to and below vessel 12 but in open communication therewith for effecting initial stripping of collected catalyst particles.

It is also contemplated providing a high temperature stripping operation between the collected catalyst in zone 12 and a first stage of catalyst regeneration yet to be discussed. The high temperature stripping operation contemplated is one which mixes hot regenerated catalyst particles with spent catalyst particles in a contact zone as described in patent applications to provide a mix temperature thereof in the range of 538°C (1000°F) to about 815°C (1500°F) and contacting the catalyst so mixed with a stripping medium selected from the group consisting of high temperature

-15-

steam, CO_2 , non combustion supporting regeneration flue gas comprising $\text{CO}+\text{CO}_2$, $\text{steam}+\text{CO}_2$, $\text{steam}+\text{CO}$ and $\text{steam}+\text{CO}+\text{CO}_2$. Generally the high temperature stripping operation will be accomplished at a temperature within
5 the range of about 593°C (1100°F) up to about 760°C (1400°F).

The catalyst stripped by one or a combination of those herein discussed is passed by conduit means
10 represented by conduit 14 of the drawing to a first stage of catalyst regeneration comprising bed 16 in the upper portion of vessel or regeneration zone 18 comprising fluid catalyst bed 20. The upper and lower regeneration zones are separated by pervious baffle or grid means
15 through which regeneration gases may flow as herein after discussed.

In the first regeneration zone comprising fluid bed 16, the spent stripped catalyst particles comprising
20 deactivating deposits of hydrocarbon material of hydrocarbon conversion are removed in substantial measure within the range of 40 to 80 weight percent by contact with a hot flue gas product up to about 760°C (1400°F) of the second stage of catalyst regeneration and comprising
25 steam, CO and oxygen containing gas substantially exceeding that of air. Thus the first stage of catalyst regeneration is one which accomplished substantial removal of hydrocarbonaceous deposits by the combination of endothermic and exothermic reactions in the presence
30 of Ni , V and Fe , oxides and promoted by the reactions of CO and CO_2 with carbon, CO_2 with hydrogen, and oxygen with carbon and hydrogen in the presence of steam (water vapor) under temperature conditions not substantially

-16-

above 760°C (1400°F) and providing a CO rich flue gas comprising steam, hydrogen, CO₂, sulfur and nitrogen oxides. Preferably CO₂ in the flue gas is kept at a low level with nitrogen oxides kept at an even lower level by
5 employing a high purity oxygen containing gas as herein discussed. The flue gas products of the first stage of regeneration are withdrawn from zone 18 by conduit 22 for use as more fully discussed below.

10 Catalyst partially regenerated in bed 16 as above discussed in withdrawn by conduit 24 and discharged in bed 20. In catalyst bed 20, the partially regenerated catalyst containing residual carbonaceous material or
15 residual coke is contacted with a steam-oxygen mixture of substantially higher oxygen purity than obtainable with air and in an amount at least equal to that required to burn hydrocarbonaceous material charged to the first stage of catalyst regeneration. The regeneration gas
20 thus described is charged by conduit 26 to a bottom portion of catalyst bed 20 to effect removal of residual coke or carbonaceous material by burning in the presence of excess oxygen producing a flue gas product thereof comprising steam, oxygen and CO₂ thereby heating the
25 catalyst to an upper temperature not exceeding about 760°C (1400°F). A water condensation product of the process obtained as hereafter discussed with some sulfur oxides therein is charged by conduit 28 for admixture with oxygen rich gas as herein provided. Catalyst regenerated
30 as above described and comprising oxidized metal contaminants of Ni, V, Fe and Cu depending on feed source and at a desired elevated temperature are withdrawn from bed 20 by conduit 6 for return to the lower portion of riser reactor 4 and use as above discussed.

-17-

The flue gas combustion products of the second stage of regeneration and comprising steam, oxygen and CO₂ pass from the dispersed phase of catalyst above bed 20 through a perforated grid or baffle member 30 and with
5 the bottom portion of bed 16 for regeneration of catalyst therein as above discussed.

A CO rich flue gas comprising steam and non combustion supporting amounts of oxygen, if any,
10 withdrawn by conduit 22 may be passed all or in part by conduit 10 to a bottom portion of riser reactor 4 or all or a portion thereof in conduit 32 may be mixed with the gasiform product comprising hydrocarbon vapors of the riser cracking operation separated from catalyst
15 particles and withdrawn from zone 12 by conduit 30. The gasiform product in conduit 30 with or without flue gas products in conduit 32 are passed by conduit 34 to a rough separation zone 36.

20 In separation zone 36 a rough separation is made between C₂ minus product gaseous component withdrawn by conduit 38 C₂ plus hydrocarbon components withdrawn by conduit 40, and a water phase comprising absorbed sulfur and nitrogen compounds withdrawn by conduit 42. The
25 hydrocarbon product in conduit 40 is passed to fractionation equipment not shown to separate and remove gasoline boiling range material from higher and lower boiling hydrocarbon component materials. The water phase in conduit 42 is passed to a treating zone 44 wherein
30 sulfur and nitrogen compounds are separated from the water phase and removed therefrom by conduit 46. Water thus treated is then withdrawn by conduit 48 for passage to the riser reactor 4 by conduit 8q to the regeneration

-18-

operation by conduit 28 or to both of these operations as required and/or desired. Also a portion of this condensed and treated water may be withdrawn by conduit 49 for passage to shift reactor 56 discussed below.

5

It will thus be recognized that the hydrocarbon conversion operation and the catalyst regeneration operation are in reactant balance with one another to particularly achieve upgrading of heavy hydrocarbon materials such as reduced crudes in cooperation with particularly reducing the formation of nitrogen oxides and discharge of such with sulfur oxides in the stock gas of a catalyst regeneration operation.

10

The C_2 minus gas phase recovered from separator 36 by conduit 38 following separation of sulfur and nitrogen oxides therefrom in equipment not shown is passed by conduit 50 in a preferred embodiment to a methanation zone 52 wherein the C_2 minus gaseous material comprising hydrogen and CO is particularly synthesized to methane under exothermic reaction conditions. A methane rich product gas is recovered from methanation zone 52 by conduit 54 for use in providing substitute natural gas.

15

20

It is further contemplated in an alternative embodiment of passing all or a portion of the product gas in conduit 38 admixed with water in conduit 39 and/or obtained from 49 to a water gas shift operation in zone 56. A product gas rich in hydrogen and comprising CO_2 with some (CO) carbon monoxide is recovered from zone 56 by conduit 58. This product gas may also be charged directly to riser reactor 4 by conduit means not shown for use as discussed above. On the other hand, the water

25

30

gas shift product of reactor 56 is preferably passed by conduit 60 to conduit 50 and thence to the methanation zone 52 for conversion thereof to methane for utilization as suggested above.

5

The alternative operating concepts of this invention are synergistically related with respect to one another to particularly suppress dehydrogenation and carbonization reactions promoted by reduced metal contaminants on the catalyst from reduced crude conversion in combination with promoting hydrogenation of hydrogenation of hydrogen deficient components of the reduced crude feed. This selective hydrocarbon conversion operation is implemented by the selective regeneration operation of this invention to the extent that deposited hydrocarbonaceous material are converted in the regeneration operation to product gases particularly useful in promoting the above desired hydrocarbon conversion operation. It will be recognized by those skilled in the art that the combination of operating embodiments herein discussed contribute measurably to the economic and efficient conversion of high boiling hydrocarbons and particularly those of high Conradson carbon producing materials. The high boiling hydrocarbons particularly suitable as high boiling feeds comprise reduced crudes, vacuum tower bottoms, resids, topped crudes and synthetic oil products of coal, shale and tar sands.

30

In another embodiment, CO-rich flue gas from the regenerator can be recycled to the riser cracking zone so that metal-on-catalyst will act as a hydrogenation catalyst to enhance the reaction between

hydrogen produced as by-product in the riser cracking zone and CO from the flue gas. The result utilizes the CO-rich flue gas a "getter" to reduce undesirable hydrogen formation ("gassing") in the product stream exiting from the reactor.

In other modifications, the invention may be described as follows: a reduced crude of 2, or even 4, Conradson carbon number is converted into high octane gasoline and other transportation fuels with excess heat released because of the high carbon levels of the feedstock. Excess carbon is converted by the invention to CO and CO₂ to balance the heat released. Excess CO is removed from the regenerator, purified and combined with hydrogen produced in the riser reactor due to the hydrogenation catalyst activity of the high metals which accumulate on the cracking catalyst because of the high metal content of the reduced crude feedstock. The resulting synthesis gas stream can be either a) converted to methane, methanol or Fischer-Tropsch products or b) using oxygen-plus-steam in place of air as the feed to the regenerator, a CO-rich product is produced which can be combined with H₂ from the cracking operation to form methane, etc. Alternatively, oxygen and steam can be fed to the regenerator to yield CO plus H₂ so that the regenerator acts as a gasifier. As the CO/CO₂-containing flue gas additionally contains SO₂ it can be recycled to the reactor as a heat source and additionally to convert SO₂ to H₂S for feed to a Claus Process sulfur removal system and the CO plus H₂ can yield CH₃ plus H₂O (Towne gas) for fuel.

-21-

As still an additional advantage, the CO/CO₂ gas helps keep the metals on catalyst in the oxidized state to deter additional coke production.

5 Lastly, hydrogen and carbon monoxide from the reactor can be combined with hydrogen and carbon monoxide from the regenerator and sent to a gas concentration unit to form methane.

10 Having thus generally discussed the processing concepts of this invention and particularly described specific embodiments in support thereof, it is to be understood that no undue restrictions are to be imposed by reasons thereof except as defined by the following
15 claims.

-22-

CLAIMS

1. In a reduced crude conversion process for heavy oil feeds having Conradson carbon numbers above 2, which process comprises contacting such heavy oil feeds with catalysts to form products comprising lower molecular weight hydrocarbons and coke on catalyst, said coke containing minor amounts of hydrogen and thereafter regenerating said catalyst by removing at least a portion of said coke; the improvement which comprises:
- (a) converting said heavy oil feed in a progressive flow riser conversion zone in the presence of water condensation product separated from hydrocarbon products of said conversion operation and regenerating said catalyst in the presence of steam and CO₂ and gas containing substantial amounts of oxygen so as to produce a CO-rich flue gas,
- (b) recovering hydrogen produced from said hydrocarbon conversion operation, separately from the hydrocarbon products of said hydrocarbon conversion operation, and
- (c) subjecting said hydrogen to purification and removing sulfur from said CO-rich flue gas, then combining said hydrogen and said flue gas to produce a fuel gas or a synthesis gas suitable for production of methane, methanol or suitable as a feedstock for Fischer-Tropsch synthesis or high octane gasoline.

-23-

2. In a catalytic cracking process for heavy oil feeds containing relatively high amounts of Conradson-carbon-contributing materials comprising contacting such heavy oil feeds with a catalyst to form products comprising lower molecular weight hydrocarbons and coke on catalyst, said coke containing minor amounts of hydrogen and thereafter regenerating said catalyst by removing at least a portion of said coke; the improvement which comprises:
- (a) converting said heavy oil feed in a progressive flow riser conversion zone in the presence of H_2O and in the further presence of a flue gas product from said catalyst regeneration step, said flue gas product comprising primarily CO , minor amounts of CO_2 and excess steam from said regeneration operation, regenerating said catalyst in the presence of steam and CO_2 and gas containing substantial amounts of oxygen,
- (b) recovering a $C-2$ product of said hydrocarbon conversion operation separate from higher boiling hydrocarbon products of said hydrocarbon conversion operation said higher boiling hydrocarbon products comprising hydrogen and CO , and
- (c) subjecting at least a part of said $C-2$ product to water gas shift reaction to produce hydrogen and CO_2 .

-24-

3. In a process for riser cracking of carbo-metallic oil feeds in the presence of catalyst to produce products comprising lower molecular weight hydrocarbons and catalyst comprising coke with subsequent regeneration of said catalyst by removing said coke at high temperatures in a regeneration zone, the improvement comprising feeding H₂O and a gas comprising at least about fifty percent by volume of oxygen whereby the products of said regeneration zone consists essentially of catalysts reduced in coke content, hydrogen content, and carbon monoxide with minor amounts of carbon dioxide, nitrogen and other gases.
4. The process according to Claim 3 wherein said regeneration zone consists of a first regeneration stage and a second regeneration stage and wherein said coke catalyst enters said first stage and is contacted with H₂O and minor amounts of oxygen and wherein said temperature is controlled to be just sufficient to support the endothermic removal of coke and wherein said catalyst subsequently enters said second stage of said regeneration zone and in said second stage is contacted with substantial additional quantities of oxygen to produce catalyst substantially reduced in coke and substantial quantities of CO₂ and wherein the products from said first stage, consisting essentially of hydrogen, CO, minor amounts of CO₂, minor amounts nitrogen and minor amounts of other gases are kept separate from the gaseous products from said second regeneration stage.

5. In a catalytic process for cracking heavy oil feeds of relatively high Conradson carbon-contributing materials in combination with a catalyst regeneration operation for removing deposited hydrocarbonaceous products of heavy oil feed conversion, the improvement which comprises:
- 5
- (a) converting heavy oil feed in a riser conversion zone in the presence of water condensation product separated from hydrocarbon products of said riser conversion in combination with a flue gas product of catalyst regeneration comprising primarily CO, very little CO₂ and excess steam used in the regeneration operation to achieve endothermic conversion removal of hydrocarbonaceous deposits from the catalyst in the presence of CO₂ and high purity oxygen containing gas,
- 10
- 15
- 20 (b) recovering a C₂ minus product of said hydrocarbon conversion operation separate from higher boiling hydrocarbon products comprising hydrogen and CO, subjecting said C₂ minus product of water gas shift reaction to produce hydrogen and CO₂, and
- 25
- (c) passing the product of said water gas shift reaction to said riser conversion zone.
- 30 6. A method for upgrading high boiling oil feed materials boiling above 343°C (650°F) of high Conradson carbon level which comprises,

-26-

- 5 (a) catalytically converting said high boiling oil
feed in the presence of a water condensation
product of the process and a flue gas product
of catalyst regeneration comprising primary CO
and excess steam of the catalyst regeneration
operation under elevated temperature conditions
in a riser cracking zone and a contact time
selected to maintain metals contaminants
primarily in an oxidized state whereby the
10 product selectivity of the operation is
improved,
- 15 (b) -separating the products of the riser conversion
operation after removal of catalyst particles
comprising carbonaceous deposits into a light
gaseous phase comprising hydrogen, CO and
methane, regenerating catalyst particles with
an oxygen rich gas stream admixed with steam to
produce a CO rich flue gas comprising steam,
20 and, charging at least a portion of the CO rich
flue gas comprising steam to said riser
conversion operation.
- 25 7. The method of Claim 6 wherein the water condensation
product is separated from the product of hydrocarbon
conversion comprises absorbed sulfur and nitrogen
compounds, and said sulfur and nitrogen compounds
are separated from said water condensation product
before recycling the water to the riser conversion
30 zone, and wherein the separated light gaseous phase
comprising hydrogen and CO is subjected to catalytic
methanation and the methane product thereof is used
as a fuel support for the process, and wherein the

5 separated light gaseous phase is subjected to water
gas shift to increase the hydrogen to CO ratio of
the stream before effecting methanation thereof, and
wherein catalyst particles comprising carbonaceous
deposits separated from hydrocarbon product vapors
is subjected to a high temperature stripping
operation in admixture with hot freshly regenerated
catalyst before subjecting said catalyst mixture to
regeneration in the presence of CO₂ rich flue gas
10 comprising steam and oxygen.

8. The method of Claim 7 wherein the high temperature
steam operation is at least 593°C (1100°F) and
stripping is accomplished with one of steam, CO₂, or
15 a mixture thereof, and wherein the catalyst
recovered from said second regeneration operation is
at a temperature not substantially above about 760°C
(1400°F) and is stripped with an inert non-reducing
gas to remove high purity absorbed oxygen therefrom
20 before transfer to said riser conversion zone, and
wherein the oxygen purity of the regeneration gas
stream exceeds that provided by air to reduce the
nitrogen content of flue gas obtained in the
regeneration operation and the oxygen requirements
25 of the combination regeneration operation is
initially charged to the second stage of catalyst
regeneration reserved for removing residual carbon
from partially regenerated catalyst, and wherein the
first stage of regeneration effected with hot flue
30 gases comprising CO₂, steam and high purity oxygen
rely upon a combination of endothermic and
exothermic reactions between CO₂ and C, CO and H₂O,
C and H₂O and oxygen and carbon to achieve up to 80

-28-

weight percent removal of deposited carbonaceous material and produce a CO rich flue gas free of combustion supporting amounts of oxygen.

- 5 9. A method for converting a reduced crude oil feed comprising vacuum tower bottoms which comprises, forming a suspension comprising a reduced crude oil feed, hot regenerated catalyst particles comprising:
- 10 (a) oxidized metal contaminants, water and a CO rich flue gas product of catalyst regeneration comprising water and sulfur oxides in a riser reaction zone, passing said suspension through said riser reaction zone, under conversion
- 15 conditions at a velocity providing a hydrocarbon residence time in the range of 0.5 to 2 seconds and a suspension temperature at the riser outlet within the range of 538°C up to 621°C (1000°F up to 1150°F),
- 20 (b) separating the suspension into a catalyst phase, a light gaseous product phase comprising hydrogen, a C₃ plus hydrocarbon phase and a water phase comprising sulfur and nitrogen
- 25 compounds, and
- (c) recycling a portion of said water phase to said riser zone following removal of sulfur and nitrogen compounds therefrom.
- 30 10. The method of Claim 9 wherein the separated catalyst phase comprises hydrocarbonaceous deposits and said hydrocarbonaceous deposits are partially removed

-29-

with a regeneration gas mixture comprising CO₂, steam and oxygen rich gas to produce a CO rich flue gas product comprising substantial steam in the absence of a combustion supporting amount of oxygen passed to said riser reaction zone, and wherein the separated catalyst phase is stripped at a temperature of at least 593°C (1100°F) in admixture with hot regenerated catalyst particles before passage to the catalyst regeneration operation and wherein the partially regenerated catalyst is further regenerated to provide a high temperature regenerated catalyst of low residual coke in a separate zone with a steam-high purity oxygen containing regeneration gas steam under conditions to produce a CO₂ rich flue gas comprising steam and oxygen, which flue gas is relied upon to effect said partial regeneration of said separated catalyst phase, and wherein the high temperature regenerated catalyst product of said further regeneration is recycled to each of said high temperature stripping operation and said riser reaction zone.

